

# Appendix B

## HDM CH 1000 BIKEWAY PLAN & DESIGN

---

### CHAPTER 1000 BIKEWAY PLANNING AND DESIGN

#### Topic 1001 - General Criteria

##### Index 1001.1 - Introduction

The needs of non-motorized transportation are an essential part of all highway projects. Topic 105 discusses Pedestrian Facilities with Index 105.3 addressing accessibility needs. This chapter discusses bicycle travel. All city, county, regional and other local agencies responsible for bikeways or roads where bicycle travel is permitted must follow the minimum bicycle planning and design criteria contained in this and other chapters of this manual (See Streets and Highways Code Section 891).

Bicycle travel can be enhanced by improved maintenance and by upgrading existing roads used regularly by bicyclists, regardless of whether or not bikeways are designated. This effort requires increased attention to the right-hand portion of roadways where bicyclists are expected to ride. On new construction, and major reconstruction projects, adequate width should be provided to permit shared use by motorists and bicyclists. On resurfacing projects, it is important to provide a uniform surface for bicyclists and pedestrians. See Index 625.1(1) and 635.1(1) for guidance in accommodating bicyclist and pedestrian needs on resurfacing projects. **When adding lanes or turn pockets, a minimum 4-foot shoulder shall be provided (see Topic 405 and Table 302.1).** When feasible, a wider shoulder should be considered. When placing a roadway edge line, sufficient room outside the line should be provided for bicyclists. When considering the restriping of roadways for more traffic lanes, the impact on bicycle travel should be assessed. Bicycle and pedestrian traffic through construction zones should be addressed in the project development process. These efforts, to preserve or improve an area for use by bicyclists, can enhance motorist and bicyclist safety and mobility.

##### 1001.2 The Role of Bikeways

Bikeways are one element of an effort to improve bicycling safety and convenience - either to help accommodate motor vehicle and bicycle traffic on shared roadways, or to complement the road system to meet needs not adequately met by roads.

Off-street bikeways in exclusive corridors can be effective in providing new recreational opportunities, or in some instances, desirable commuter routes. They can also be used to close gaps where barriers exist to bicycle travel (e.g., river crossing). On-street bikeways can serve to enhance safety and convenience, especially if other commitments are made in conjunction with establishment of bikeways, such as: elimination of parking or increasing roadway width, elimination of surface irregularities and roadway obstacles, frequent street sweeping, establishing intersection priority on the bike route street as compared with the majority of cross streets, and installation of bicycle-sensitive loop detectors at signalized intersections.

##### 1001.3 The Decision to Develop Bikeways

The decision to develop bikeways should be made with the knowledge that bikeways are not the solution to all bicycle-related problems. Many of the common problems are related to improper bicyclist and motorist behavior and can only be corrected through effective education and enforcement programs. The development of well conceived bikeways can have a positive effect on bicyclist and motorist behavior. Conversely, poorly conceived bikeways can be counterproductive to education and enforcement programs.

##### 1001.4 Definitions

The Streets and Highway Code Section 890.4 defines a "Bikeway" as a facility that is provided primarily for bicycle travel.

- (1) Class I Bikeway (Bike Path). Provides a completely separated right of way for the exclusive use of bicycles and pedestrians with crossflow by motorists minimized.
- (2) Class II Bikeway (Bike Lane). Provides a striped lane for one-way bike travel on a street or highway.

**1000-2**

September 1, 2006

**HIGHWAY DESIGN MANUAL**

- (3) Class III Bikeway (Bike Route). Provides for shared use with pedestrian or motor vehicle traffic.

**1001.5 Streets and Highways Code****References - Chapter 8 - Nonmotorized Transportation**

- (a) Section 887 -- Definition of nonmotorized facility.
- (b) Section 887.6 -- Agreements with local agencies to construct and maintain nonmotorized facilities.
- (c) Section 887.8 -- Payment for construction and maintenance of nonmotorized facilities approximately paralleling State highways.
- (d) Section 888 -- Severance of existing major nonmotorized route by freeway construction.
- (e) Section 888.2 -- Incorporation of nonmotorized facilities in the design of freeways.
- (f) Section 888.4 -- Requires Caltrans to budget not less than \$360,000 annually for nonmotorized facilities used in conjunction with the State highway system.
- (g) Section 890.4 -- Class I, II, and III bikeway definitions.
- (h) Section 890.6 - 890.8 -- Caltrans and local agencies to develop design criteria and symbols for signs, markers, and traffic control devices for bikeways and roadways where bicycle travel is permitted.
- (i) Section 891 -- Local agencies must comply with design criteria and uniform symbols.
- (j) Section 892 -- Use of abandoned right-of-way as a nonmotorized facility.
- (c) Section 21206 -- Allows local agencies to regulate operation of bicycles on pedestrian or bicycle facilities.
- (d) Section 21207 -- Allows local agencies to establish bike lanes on non-state highways.
- (e) Section 21207.5 -- Prohibits motorized bicycles on bike paths or bike lanes.
- (f) Section 21208 -- Specifies permitted movements by bicyclists from bike lanes.
- (g) Section 21209 -- Specifies permitted movements by motorists in bike lanes.
- (h) Section 21210 -- Prohibits bicycle parking on sidewalks unless pedestrians have an adequate path.
- (i) Section 21211 -- Prohibits impeding or obstruction of bicyclists on bike paths.
- (j) Section 21717 -- Requires a motorist to drive in a bike lane prior to making a turn.
- (k) Section 21960 -- Use of freeways by bicyclists.

**Topic 1002 - Bikeway Facilities****1002.1 Selection of the Type of Facility**

The type of facility to select in meeting the bicycle need is dependent on many factors, but the following applications are the most common for each type.

- (1) *Shared Roadway (No Bikeway Designation)*. Most bicycle travel in the State now occurs on streets and highways without bikeway designations. This probably will be true in the future as well. In some instances, entire street systems may be fully adequate for safe and efficient bicycle travel, and signing and pavement marking for bicycle use may be unnecessary. In other cases, prior to designation as a bikeway, routes may need improvements for bicycle travel.

Many rural highways are used by touring bicyclists for intercity and recreational travel. It might be inappropriate to designate the highways as bikeways because of the limited use and the lack of continuity with other bike routes. However, the development and

**1001.6 Vehicle Code References - Bicycle Operation**

- (a) Section 21200 -- Bicyclist's rights and responsibilities for traveling on highways.
- (b) Section 21202 -- Bicyclist's position on roadways when traveling slower than the normal traffic speed.

maintenance of 4-foot paved roadway shoulders with a standard 4 inch edge line can significantly improve the safety and convenience for bicyclists and motorists along such routes.

(2) *Class I Bikeway (Bike Path)*. Generally, bike paths should be used to serve corridors not served by streets and highways or where wide right of way exists, permitting such facilities to be constructed away from the influence of parallel streets. Bike paths should offer opportunities not provided by the road system. They can either provide a recreational opportunity, or in some instances, can serve as direct high-speed commute routes if cross flow by motor vehicles and pedestrian conflicts can be minimized. The most common applications are along rivers, ocean fronts, canals, utility right of way, abandoned railroad right of way, within college campuses, or within and between parks. There may also be situations where such facilities can be provided as part of planned developments. Another common application of Class I facilities is to close gaps to bicycle travel caused by construction of freeways or because of the existence of natural barriers (rivers, mountains, etc.).

(3) *Class II Bikeway (Bike Lane)*. Bike lanes are established along streets in corridors where there is significant bicycle demand, and where there are distinct needs that can be served by them. The purpose should be to improve conditions for bicyclists in the corridors. Bike lanes are intended to delineate the right of way assigned to bicyclists and motorists and to provide for more predictable movements by each. But a more important reason for constructing bike lanes is to better accommodate bicyclists through corridors where insufficient room exists for safe bicycling on existing streets. This can be accomplished by reducing the number of lanes, reducing lane width, or prohibiting parking on given streets in order to delineate bike lanes. In addition, other things can be done on bike lane streets to improve the situation for bicyclists, that might not be possible on all streets (e.g., improvements to the surface, augmented sweeping programs, special signal facilities,

etc.). Generally, pavement markings alone will not measurably enhance bicycling.

If bicycle travel is to be controlled by delineation, special efforts should be made to assure that high levels of service are provided with these lanes.

In selecting appropriate streets for bike lanes, location criteria discussed in the next section should be considered.

(4) *Class III Bikeway (Bike Route)*. Bike routes are shared facilities which serve either to:

- (a) Provide continuity to other bicycle facilities (usually Class II bikeways); or
- (b) Designate preferred routes through high demand corridors.

As with bike lanes, designation of bike routes should indicate to bicyclists that there are particular advantages to using these routes as compared with alternative routes. This means that responsible agencies have taken actions to assure that these routes are suitable as shared routes and will be maintained in a manner consistent with the needs of bicyclists. Normally, bike routes are shared with motor vehicles. The use of sidewalks as Class III bikeways is strongly discouraged.

It is emphasized that the designation of bikeways as Class I, II and III should not be construed as a hierarchy of bikeways; that one is better than the other. Each class of bikeway has its appropriate application.

In selecting the proper facility, an overriding concern is to assure that the proposed facility will not encourage or require bicyclists or motorists to operate in a manner that is inconsistent with the rules of the road.

An important consideration in selecting the type of facility is continuity. Alternating segments of Class I and Class II (or Class III) bikeways along a route are generally incompatible, as street crossings by bicyclists are required when the route changes character. Also, wrong-way bicycle travel will occur on the street beyond the ends of bike paths because of the inconvenience of having to cross the street.

## Topic 1003 - Design Criteria

### 1003.1 Class I Bikeways

Class I bikeways (bike paths) are facilities with exclusive right of way, with cross flows by motorists minimized. Section 890.4 of the Streets and Highways Code describes Class I bikeways as serving "the exclusive use of bicycles and pedestrians". However, experience has shown that if significant pedestrian use is anticipated, separate facilities for pedestrians are necessary to minimize conflicts. Dual use by pedestrians and bicycles is undesirable, and the two should be separated wherever possible.

Sidewalk facilities are not considered Class I facilities because they are primarily intended to serve pedestrians, generally cannot meet the design standards for Class I bikeways, and do not minimize motorist cross flows. See Index 1003.3 for discussion relative to sidewalk bikeways.

By State law, motorized bicycles ("mopeds") are prohibited on bike paths unless authorized by ordinance or approval of the agency having jurisdiction over the path. Likewise, all motor vehicles are prohibited from bike paths. These prohibitions can be strengthened by signing.

- (1) *Widths.* **The minimum paved width for a two-way bike path shall be 8 feet. The minimum paved width for a one-way bike path shall be 5 feet. A minimum 2-foot wide graded area shall be provided adjacent to the pavement (see Figure 1003.1A).** A 3-foot graded area is recommended to provide clearance from poles, trees, walls, fences, guardrails, or other lateral obstructions. A wider graded area can also serve as a jogging path. Where the paved width is wider than the minimum required, the graded area may be reduced accordingly; however, the graded area is a desirable feature regardless of the paved width. Development of a one-way bike path should be undertaken only after careful consideration due to the problems of enforcing one-way operation and the difficulties in maintaining a path of restricted width.

Where heavy bicycle volumes are anticipated and/or significant pedestrian traffic is expected, the paved width of a two-way path should be

greater than 8-feet, preferably 12 feet or more. Another important factor to consider in determining the appropriate width is that bicyclists will tend to ride side by side on bike paths, necessitating more width for safe use.

Experience has shown that paved paths less than 12 feet wide sometimes break up along the edge as a result of loads from maintenance vehicles.

Where equestrians are expected, a separate facility should be provided.


- (2) *Clearance to Obstructions.* **A minimum 2-foot horizontal clearance to obstructions shall be provided adjacent to the pavement (see Figure 1003.1A).** A 3-foot clearance is recommended. Where the paved width is wider than the minimum required, the clearance may be reduced accordingly; however, an adequate clearance is desirable regardless of the paved width. If a wide path is paved contiguous with a continuous fixed object (e.g., block wall), a 4-inch white edge line, 2 feet from the fixed object, is recommended to minimize the likelihood of a bicyclist hitting it. **The clear width on structures between railings shall be not less than 8 feet.** It is desirable that the clear width of structures be equal to the minimum clear width of the path (i.e., 12 feet).

**The vertical clearance to obstructions across the clear width of the path shall be a minimum of 8 feet.** Where practical, a vertical clearance of 10 feet is desirable.

- (3) *Signing and Delineation.* For application and placement of signs, see the Manual on Uniform Traffic Control Devices (MUTCD), Section 9B.01 and the MUTCD and California Supplement Section 9B.01 and Figure 9B-101. For pavement marking guidance, see the MUTCD, Section 9C.03.
- (4) *Intersections with Highways.* Intersections are a prime consideration in bike path design. If alternate locations for a bike path are available, the one with the most favorable intersection conditions should be selected.


Figure 1003.1A

Two-Way Bike Path on Separate  
Right of Way

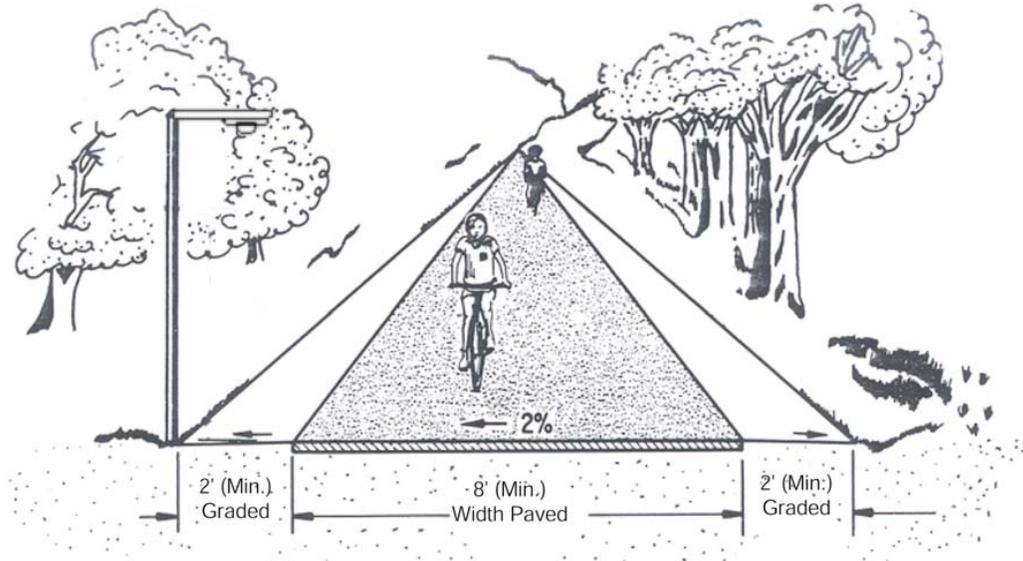

Note: For sign clearances, see MUTCD, Figure 9B-1.

**Figure 1003.1B**  
**Typical Cross Section of Bike**  
**Path Along Highway**

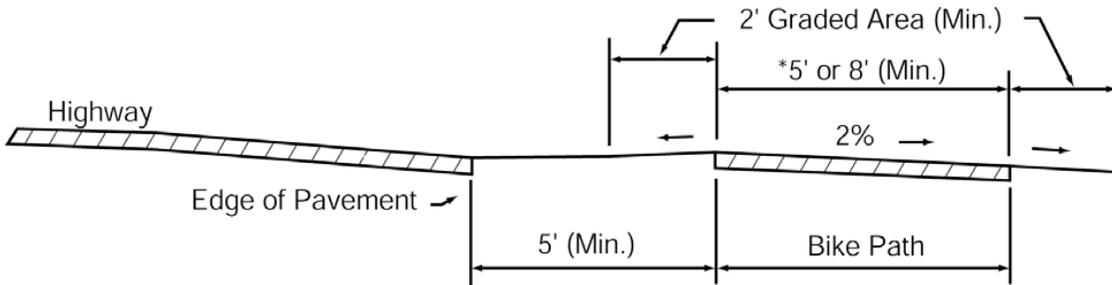

NOTE: See Index 1003.1(5)

\*One - Way: 5' Minimum Width  
Two - Way: 8' Minimum Width

Where motor vehicle cross traffic and bicycle traffic is heavy, grade separations are desirable to eliminate intersection conflicts. Where grade separations are not feasible, assignment of right of way by traffic signals should be considered. Where traffic is not heavy, stop or yield signs for bicyclists may suffice.

Bicycle path intersections and approaches should be on relatively flat grades. Stopping sight distances at intersections should be checked and adequate warning should be given to permit bicyclists to stop before reaching the intersection, especially on downgrades.

When crossing an arterial street, the crossing should either occur at the pedestrian crossing, where motorists can be expected to stop, or at a location completely out of the influence of any intersection to permit adequate opportunity for bicyclists to see turning vehicles. When crossing at midblock locations, right of way should be assigned by devices such as yield signs, stop signs, or traffic signals which can be activated by bicyclists. Even when crossing within or adjacent to the pedestrian crossing, stop or yield signs for bicyclists should be placed to minimize potential for conflict resulting from turning autos. Where bike path stop or yield signs are visible to approaching motor vehicle traffic, they should be shielded to avoid confusion. In some cases, Bike Xing signs may be placed in advance of the crossing to alert motorists. Ramps should be installed in the curbs, to preserve the utility of the bike path. Ramps should be the same width as the bicycle paths. Curb cuts and ramps should provide a smooth transition between the bicycle paths and the roadway.

- (5) *Separation Between Bike Paths and Highways.* A wide separation is recommended between bike paths and adjacent highways (see Figure 1003.1B). **Bike paths closer than 5 feet from the edge of the shoulder shall include a physical barrier to prevent bicyclists from encroaching onto the highway. Bike paths within the clear recovery zone of freeways shall include a physical barrier separation.** Suitable barriers could include chain link fences or dense shrubs. Low barriers (e.g., dikes, raised traffic bars) next to a highway are not

recommended because bicyclists could fall over them and into oncoming automobile traffic. In instances where there is danger of motorists encroaching into the bike path, a positive barrier (e.g., concrete barrier, steel guardrail) should be provided. See Index 1003.6 for criteria relative to bike paths carried over highway bridges.

Bike paths immediately adjacent to streets and highways are not recommended. They should not be considered a substitute for the street, because many bicyclists will find it less convenient to ride on these types of facilities as compared with the streets, particularly for utility trips.

- (6) *Bike Paths in the Median of Highways.* As a general rule, bike paths in the median of highways are not recommended because they require movements contrary to normal rules of the road. Specific problems with such facilities include:
- (a) Bicyclist right turns from the center of roadways are unnatural for bicyclists and confusing to motorists.
  - (b) Proper bicyclist movements through intersections with signals are unclear.
  - (c) Left-turning motorists must cross one direction of motor vehicle traffic and two directions of bicycle traffic, which increases conflicts.
  - (d) Where intersections are infrequent, bicyclists will enter or exit bike paths at midblock.
  - (e) Where medians are landscaped, visual relationships between bicyclists and motorists at intersections are impaired.

For the above reasons, bike paths in the median of highways should be considered only when the above problems can be avoided. **Bike paths shall not be designed in the medians of freeways or expressways.**

- (7) *Design Speed.* The proper design speed for a bike path is dependent on the expected type of use and on the terrain. **The minimum design speed for bike paths shall be 25 miles per hour except as noted in Table 1003.1.**

**Table 1003.1****Bike Path Design Speeds**

Type of Facility	Design Speed (mph)
Bike Paths with Mopeds Prohibited	25
Bike Paths with Mopeds Permitted	30
Bike Paths on Long Downgrades (steeper than 4%, and longer than 500')	30

**Installation of "speed bumps" or other similar surface obstructions, intended to cause bicyclists to slow down in advance of intersections or other geometric constraints, shall not be used.** These devices cannot compensate for improper design.

- (8) *Horizontal Alignment and Superelevation.* The minimum radius of curvature negotiable by a bicycle is a function of the superelevation rate of the bicycle path surface, the coefficient of friction between the bicycle tires and the bicycle path surface, and the speed of the bicycle.

For most bicycle path applications the superelevation rate will vary from a minimum of 2 percent (the minimum necessary to encourage adequate drainage) to a maximum of approximately 5 percent (beyond which maneuvering difficulties by slow bicyclists and adult tricyclists might be expected). A straight 2 percent cross slope is recommended on tangent sections. The minimum superelevation rate of 2 percent will be adequate for most conditions and will simplify construction. Superelevation rates steeper than 5 percent should be avoided on bike paths expected to have adult tricycle traffic.

The coefficient of friction depends upon speed; surface type, roughness, and condition; tire type and condition; and whether the surface is wet or dry. Friction factors used for design should be selected based upon the point at which centrifugal force causes the bicyclist to

recognize a feeling of discomfort and instinctively act to avoid higher speed. Extrapolating from values used in highway design, design friction factors for paved bicycle paths can be assumed to vary from 0.31 at 12 miles per hour to 0.21 at 30 miles per hour. Although there is no data available for unpaved surfaces, it is suggested that friction factors be reduced by 50 percent to allow a sufficient margin of safety.

The minimum radius of curvature can be selected from Figure 1003.1C. When curve radii smaller than those shown in Figure 1003.1C must be used on bicycle paths because of right of way, topographical or other considerations, standard curve warning signs and supplemental pavement markings should be installed. The negative effects of nonstandard curves can also be partially offset by widening the pavement through the curves.

- (9) *Stopping Sight Distance.* To provide bicyclists with an opportunity to see and react to the unexpected, a bicycle path should be designed with adequate stopping sight distances. The distance required to bring a bicycle to a full controlled stop is a function of the bicyclist's perception and brake reaction time, the initial speed of the bicycle, the coefficient of friction between the tires and the pavement, and the braking ability of the bicycle.

Figures 1003.1D and 1003.1E indicate the minimum stopping sight distances for various design speeds and grades. For two-way bike paths, the descending direction, that is, where "G" is negative, will control the design.

- (10) *Length of Crest Vertical Curves.* Figure 1003.1F indicates the minimum lengths of crest vertical curves for varying design speeds.

- (11) *Lateral Clearance on Horizontal Curves.* Figure 1003.1G indicates the minimum clearances to line of sight obstructions for horizontal curves. The required lateral clearance is obtained by entering Figure 1003.1G with the stopping sight distance from Figures 1003.1D and 1003.1E, the proposed horizontal curve radius.

**Figure 1003.1C****Curve Radii & Superelevations**

$$R = \frac{V^2}{15(0.01e + f)}$$

where,

R = Minimum radius of curvature (ft)

V = Design Speed (mph)


e = Rate of bikeway superelevation, percent

f = Coefficient of friction

Design Speed-V (mph)	Friction Factor-f	Superelevation-e (%)	Minimum Radius-R (ft)
15	0.31	2	46
20	0.28	2	89
25	0.25	2	155
30	0.21	2	261
15	0.31	3	45
20	0.28	3	86
25	0.25	3	149
30	0.21	3	250
15	0.31	4	43
20	0.28	4	84
25	0.25	4	144
30	0.21	4	240
15	0.31	5	42
20	0.28	5	81
25	0.25	5	139
30	0.21	5	231

Figure 1003.1D

Stopping Sight Distance – Descending Grade

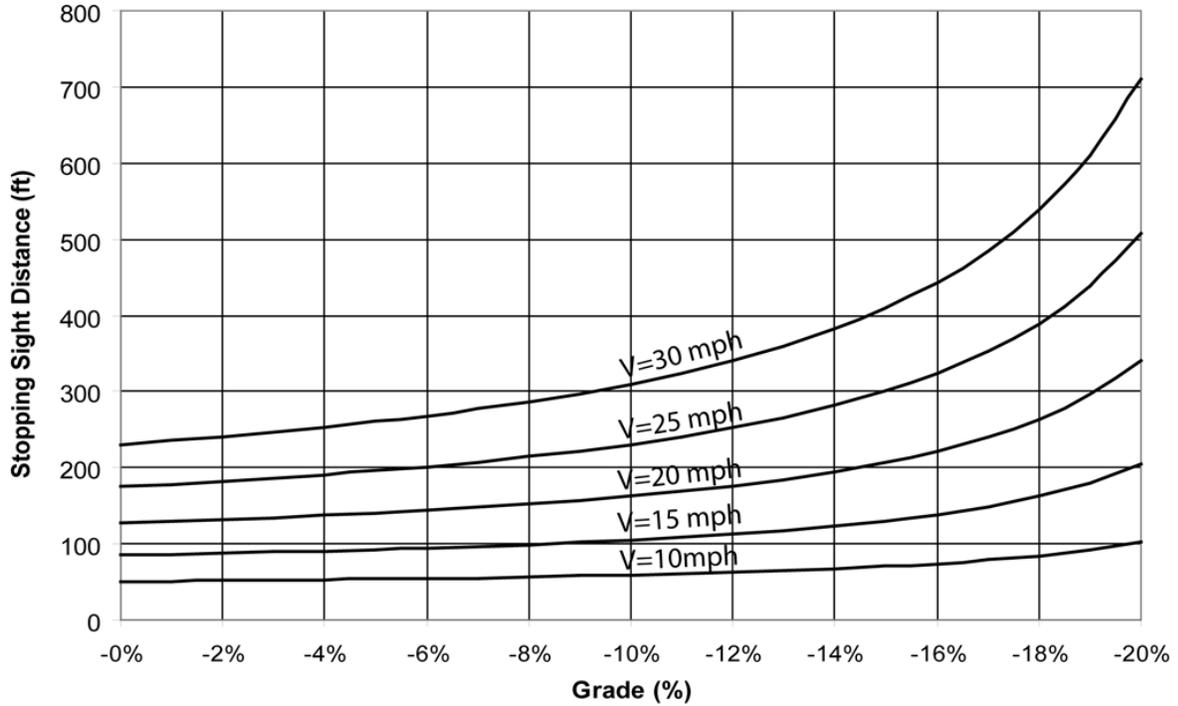


$$S = \frac{V^2}{30(f - G)} + 3.67V$$

- Where : S = Stopping sight distance (ft)
- V = Velocity (mph)
- f = Coefficient of friction (use 0.25)
- G = Grade (ft/ft) rise/run

Figure 1003.1E

Stopping Sight Distance – Ascending Grade

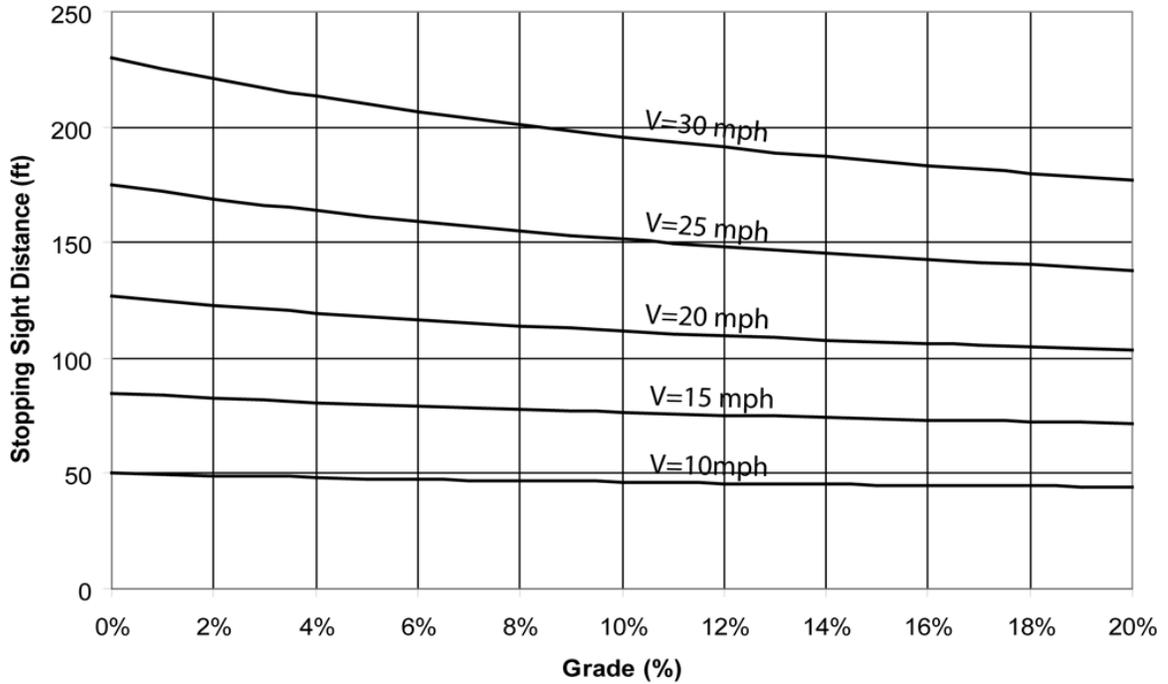

$$S = \frac{V^2}{30(f + G)} + 3.67V$$

- Where : S = Stopping sight distance (ft)
- V = Velocity (mph)
- f = Coefficient of friction (use 0.25)
- G = Grade (ft/ft) rise/run

Bicyclists frequently ride abreast of each other on bicycle paths, and on narrow bicycle paths, bicyclists have a tendency to ride near the middle of the path. For these reasons, and because of the serious consequences of a head on bicycle accident, lateral clearances on horizontal curves should be calculated based on the sum of the stopping sight distances for bicyclists traveling in opposite directions around the curve. Where this is not possible or feasible, consideration should be given to widening the path through the curve, installing a yellow center line, installing a curve warning sign, or some combination of these alternatives.

(12) *Grades.* Bike paths generally attract less skilled bicyclists, so it is important to avoid steep grades in their design. Bicyclists not physically conditioned will be unable to negotiate long, steep uphill grades. Since novice bicyclists often ride poorly maintained bicycles, long downgrades can cause problems. For these reasons, bike paths with long, steep grades will generally receive very little use. The maximum grade rate recommended for bike paths is 5 percent. It is desirable that sustained grades be limited to 2 percent if a wide range of riders is to be accommodated. Steeper grades can be tolerated for short segments (e.g., up to about 500 feet). Where steeper grades are necessitated, the design speed should be increased and additional width should be provided for maneuverability.

(13) *Pavement Structure.* The pavement structure of a bike path should be designed in the same manner as a highway, with consideration given to the quality of the basement soil and the anticipated loads the bikeway will experience. It is important to construct and maintain a smooth riding surface with skid resistant qualities. Principal loads will normally be from maintenance and emergency vehicles. Expansive soil should be given special consideration and will probably require a special pavement structure. A minimum pavement thickness of 2 inches of Hot Mix Asphalt (HMA) is recommended. HMA (as described in Department of Transportation Standard Specifications), with ½ inch maximum aggregate and medium grading is recommended. Consideration should be given

to increasing the asphalt content to provide increased pavement life. Consideration should also be given to sterilization of basement soil to preclude possible weed growth through the pavement.

At unpaved highway or driveway crossings of bicycle paths, the highway or driveway should be paved a minimum of 10 feet on each side of the crossing to reduce the amount of gravel being scattered along the path by motor vehicles. The pavement structure at the crossing should be adequate to sustain the expected loading at that location.

(14) *Drainage.* For proper drainage, the surface of a bike path should have a cross slope of 2 percent. Sloping in one direction usually simplifies longitudinal drainage design and surface construction, and accordingly is the preferred practice. Ordinarily, surface drainage from the path will be adequately dissipated as it flows down the gently sloping shoulder. However, when a bike path is constructed on the side of a hill, a drainage ditch of suitable dimensions may be necessary on the uphill side to intercept the hillside drainage. Where necessary, catch basins with drains should be provided to carry intercepted water across the path. Such ditches should be designed in such a way that no undue obstacle is presented to bicyclists.

Culverts or bridges are necessary where a bike path crosses a drainage channel.

(15) *Barrier Posts.* It may be necessary to install barrier posts at entrances to bike paths to prevent motor vehicles from entering. For barrier post placement, visibility marking, and pavement markings, see the MUTCD and California Supplement, Section 9C.101.

Generally, barrier configurations that preclude entry by motorcycles present safety and convenience problems for bicyclists. Such devices should be used only where extreme problems are encountered.

**Figure 1003.1F**

**Minimum Length of Crest Vertical Curve (L)  
Based on Stopping Sight Distance (S)**

$$L = 2S - \frac{1456}{A} \quad \text{when } S > L$$

$$L = \frac{AS^2}{1456} \quad \text{when } S < L$$

Double line represents  $S = L$

L = Minimum length of vertical curve – feet

A = Algebraic grade difference - %

S = Stopping sight distance – feet

Refer to Figure 1003.1D to determine “S”, for a given design speed “V”


Height of cyclist eye = 4½ feet

Height of object = 4 inches

A (%)	S = Stopping Sight Distance (ft)													
	30	50	70	90	110	130	150	170	190	210	230	250	270	290
3												15	55	95
4									16	56	96	136	176	216
5							9	49	89	129	169	209	249	289
6		<b>S &gt; L</b>				17	57	97	137	177	217	258	300	347
7					12	52	92	132	172	212	254	300	350	404
8					38	78	118	158	198	242	291	343	401	462
9				18	58	98	138	179	223	273	327	386	451	520
10				34	74	114	155	198	248	303	363	429	501	578
11			8	48	88	128	170	218	273	333	400	472	551	635
12			19	59	99	139	185	238	298	363	436	515	601	693
13			28	68	108	151	201	258	322	394	472	558	651	751
14			36	76	116	163	216	278	347	424	509	601	701	809
15		3	43	83	125	174	232	298	372	454	545	644	751	866
16		9	49	89	133	186	247	318	397	485	581	687	801	924
17		14	54	95	141	197	263	337	421	515	618	730	851	982
18		19	59	100	150	209	278	357	446	545	654	773	901	1040
19		23	63	106	158	221	294	377	471	575	690	816	951	1097
20		27	67	111	166	232	309	397	496	606	727	859	1001	1155
21		31	71	117	175	244	325	417	521	636	763	901	1051	1213
22		34	74	122	183	255	340	437	545	666	799	944	1102	1271
23		37	77	128	191	267	355	457	570	697	836	987	1152	1329
24		39	81	134	199	279	371	476	595	727	872	1030	1202	1386
25	2	42	84	139	208	290	386	496	620	757	908	1073	1252	1444

**S < L**

**Figure 1003.1G**  
**Minimum Lateral Clearance (m) on Horizontal Curves**

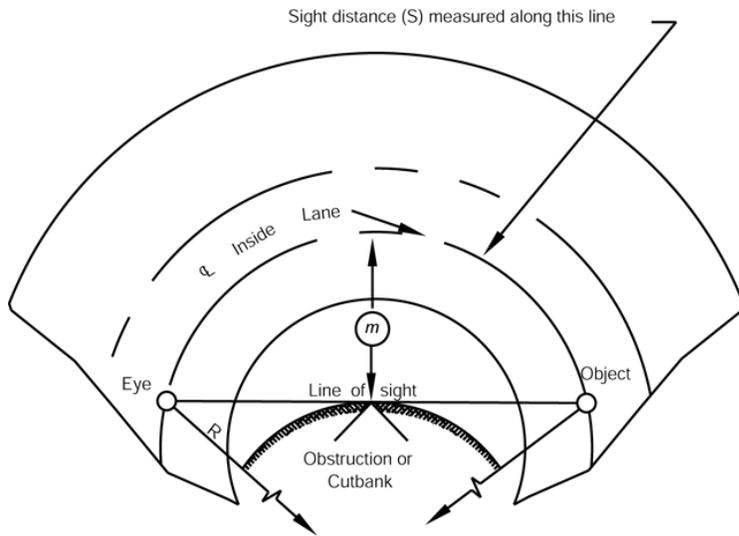

S = Sight distance in feet.  
R = Radius of  $\ell$  of lane in feet.  
m = Distance from  $\ell$  of lane in feet.  
See Figure 1003.1D to determine "S" for a given design speed "V".

Angle is expressed in degrees

$$m = R \left[ 1 - \cos \left( \frac{28.65S}{R} \right) \right]$$

$$S = \frac{R}{28.65} \left[ \cos^{-1} \left( \frac{R - m}{R} \right) \right]$$

Formula applies only when S is equal to or less than length of curve.

Line of sight is 28" above  $\ell$  inside lane at point of obstruction.

R (ft)	S = Stopping Sight Distance (ft)														
	20	40	60	80	100	120	140	160	180	200	220	240	260	280	300
25	2.0	7.6	15.9												
50	1.0	3.9	8.7	15.2	23.0	31.9	41.5								
75	0.7	2.7	5.9	10.4	16.1	22.8	30.4	38.8	47.8	57.4	67.2				
95	0.5	2.1	4.7	8.3	12.9	18.3	24.7	31.8	39.5	48.0	56.9	66.3	75.9	85.8	
125	0.4	1.6	3.6	6.3	9.9	14.1	19.1	24.7	31.0	37.9	45.4	53.3	61.7	70.6	79.7
155	0.3	1.3	2.9	5.1	8.0	11.5	15.5	20.2	25.4	31.2	37.4	44.2	51.4	59.1	67.1
175	0.3	1.1	2.6	4.6	7.1	10.2	13.8	18.0	22.6	27.8	33.5	39.6	46.1	53.1	60.5
200	0.3	1.0	2.2	4.0	6.2	8.9	12.1	15.8	19.9	24.5	29.5	34.9	40.8	47.0	53.7
225	0.2	0.9	2.0	3.5	5.5	8.0	10.8	14.1	17.8	21.9	26.4	31.3	36.5	42.2	48.2
250	0.2	0.8	1.8	3.2	5.0	7.2	9.7	12.7	16.0	19.7	23.8	28.3	33.1	38.2	43.7
275	0.2	0.7	1.6	2.9	4.5	6.5	8.9	11.6	14.6	18.0	21.7	25.8	30.2	34.9	39.9
300	0.2	0.7	1.5	2.7	4.2	6.0	8.1	10.6	13.4	16.5	19.9	23.7	27.7	32.1	36.7
350	0.1	0.6	1.3	2.3	3.6	5.1	7.0	9.1	11.5	14.2	17.1	20.4	23.9	27.6	31.7
390	0.1	0.5	1.2	2.1	3.2	4.6	6.3	8.2	10.3	12.8	15.4	18.3	21.5	24.9	28.5
500	0.1	0.4	0.9	1.6	2.5	3.6	4.9	6.4	8.1	10.0	12.1	14.3	16.8	19.5	22.3
565		0.4	0.8	1.4	2.2	3.2	4.3	5.7	7.2	8.8	10.7	12.7	14.9	17.3	19.8
600		0.3	0.8	1.3	2.1	3.0	4.1	5.3	6.7	8.3	10.1	12.0	14.0	16.3	18.7
700		0.3	0.6	1.1	1.8	2.6	3.5	4.6	5.8	7.1	8.6	10.3	12.0	14.0	16.0
800		0.3	0.6	1.0	1.6	2.2	3.1	4.0	5.1	6.2	7.6	9.0	10.5	12.2	14.4
900		0.2	0.5	0.9	1.4	2.0	2.7	3.6	4.5	5.6	6.7	8.0	9.4	10.9	12.5
1000		0.2	0.5	0.8	1.3	1.8	2.4	3.2	4.0	5.0	6.0	7.2	8.4	9.8	11.2

(16) *Lighting.* Fixed-source lighting reduces conflicts along paths and at intersections. In addition, lighting allows the bicyclist to see the bicycle path direction, surface conditions, and obstacles. Lighting for bicycle paths is important and should be considered where riding at night is expected, such as bicycle paths serving college students or commuters, and at highway intersections. Lighting should also be considered through underpasses or tunnels, and when nighttime security could be a problem.

Depending on the location, average maintained horizontal illumination levels of 5 lux to 22 lux should be considered. Where special security problems exist, higher illumination levels may be considered. Light standards (poles) should meet the recommended horizontal and vertical clearances. Luminaires and standards should be at a scale appropriate for a pedestrian or bicycle path.

### 1003.2 Class II Bikeways

Class II bikeways (bike lanes) for preferential use by bicycles are established within the paved area of highways. Bike lane pavement markings are intended to promote an orderly flow of traffic, by establishing specific lines of demarcation between areas reserved for bicycles and lanes to be occupied by motor vehicles. This effect is supported by bike lane signs and pavement markings. Bike lane pavement markings can increase bicyclists' confidence that motorists will not stray into their path of travel if they remain within the bike lane. Likewise, with more certainty as to where bicyclists will be, passing motorists are less apt to swerve toward opposing traffic in making certain they will not hit bicyclists.

#### **Class II bike lanes shall be one-way facilities.**

Two-way bike lanes (or bike paths that are contiguous to the roadway) are not permitted, as such facilities have proved unsatisfactory and promote riding against the flow of motor vehicle traffic.

(1) *Widths.* Typical Class II bikeway configurations are illustrated in Figure 1003.2A and are described below:

(a) Figure 1003.2A-(1) depicts bike lanes on an urban type curbed street where parking stalls (or continuous parking stripes) are

marked. Bike lanes are located between the parking area and the traffic lanes. **As indicated, 5 feet shall be the minimum width of bike lane where parking stalls are marked.** If parking volume is substantial or turnover high, an additional 1 foot to 2-foot of width is desirable.

**Bike lanes shall not be placed between the parking area and the curb.** Such facilities increase the conflict between bicyclists and opening car doors and reduce visibility at intersections. Also, they prevent bicyclists from leaving the bike lane to turn left and cannot be effectively maintained.

(b) Figure 1003.2A-(2) depicts bike lanes on an urban-type curbed street, where parking is permitted, but without parking stripe or stall marking. Bike lanes are established in conjunction with the parking areas. **As indicated, 11 feet or 12 feet (depending on the type of curb) shall be the minimum width of the bike lane where parking is permitted.** This type of lane is satisfactory where parking is not extensive and where turnover of parked cars is infrequent. However, if parking is substantial, turnover of parked cars is high, truck traffic is substantial, or if vehicle speeds exceed 35 miles per hour, additional width is recommended.

(c) Figure 1003.2A-(3) depicts bike lanes along the outer portions of an urban type curbed street, where parking is prohibited. This is generally the most desirable configuration for bike lanes, as it eliminates potential conflicts resulting from auto parking (e.g., opening car doors). **As indicated, if no gutter exists, the minimum bike lane width shall be 4 feet. With a normal 2-foot gutter, the minimum bike lane width shall be 5 feet.** The intent is to provide a minimum 4 feet wide bike lane, but with at least 3 feet between the traffic lane and the longitudinal joint at the concrete gutter, since the gutter reduces the effective width of the bike lane for two reasons. First, the longitudinal joint may not always be smooth, and may be difficult

to ride along. Secondly, the gutter does not provide a suitable surface for bicycle travel. Where gutters are wide (say, 4 feet), an additional 3 feet must be provided because bicyclists should not be expected to ride in the gutter. Wherever possible, the width of bike lanes should be increased 6 feet to 8 feet to provide for greater safety. Eight-foot bike lanes can also serve as emergency parking areas for disabled vehicles.

**Striping bike lanes next to curbs where parking is prohibited only during certain hours shall be done only in conjunction with special signing to designate the hours bike lanes are to be effective.** Since the Vehicle Code requires bicyclists to ride in bike lanes where provided (except under certain conditions), proper signing is necessary to inform bicyclists that they are required to ride in bike lanes only during the course of the parking prohibition. This type of bike lane should be considered only if the vast majority of bicycle travel would occur during the hours of the parking prohibition, and only if there is a firm commitment to enforce the parking prohibition. Because of the obvious complications, this type of bike lane is not encouraged for general application.

Figure 1003.2A-(4) depicts bike lanes on a highway without curbs and gutters. This location is in an undeveloped area where infrequent parking is handled off the pavement. This can be accomplished by supplementing the bike lane signing with R25 (park off pavement) signs, or R26 (no parking) signs. **Minimum widths shall be as shown.** Additional width is desirable, particularly where motor vehicle speeds exceed 35 miles per hour

Per Topic 301, the minimum lane width standard is 12 feet. There are situations where it may be desirable to reduce the width of the traffic lanes in order to add or widen bicycle lanes or shoulders. In determining the appropriateness of narrower traffic lanes, consideration should be given to factors such as motor vehicle speeds,

truck volumes, alignment, bicycle lane width, sight distance, and the presence of on-street vehicle parking. When vehicle parking is permitted adjacent to a bicycle lane, or on a shoulder where bicycling is not prohibited, reducing the width of the adjacent traffic lane may allow for wider bicycle lanes or shoulders, to provide greater clearance between bicyclists and driver-side doors when opened. Where favorable conditions exist, traffic lanes of 11 feet may be feasible but must be approved per Topic 301.

Bike lanes are not advisable on long, steep downgrades, where bicycle speeds greater than 30 miles per hour are expected. As grades increase, downhill bicycle speeds will increase, which increases the problem of riding near the edge of the roadway. In such situations, bicycle speeds can approach those of motor vehicles, and experienced bicyclists will generally move into the motor vehicle lanes to increase sight distance and maneuverability. If bike lanes are to be marked, additional width should be provided to accommodate higher bicycle speeds.

If the bike lanes are to be located on one-way streets, they should be placed on the right side of the street. Bike lanes on the left side would cause bicyclists and motorists to undertake crossing maneuvers in making left turns onto a two-way street.

- (2) *Signing and Pavement Markings.* Details for signing and pavement marking of Class II bikeways are found in the MUTCD and California Supplement, Section 9C.04.
- (3) *At-grade Intersection Design.* Most auto/bicycle accidents occur at intersections. For this reason, bikeway design at intersections should be accomplished in a manner that will minimize confusion by motorists and bicyclists, and will permit both to operate in accordance with the normal rules of the road.

**Figure 1003.2A  
Typical Bike Lane Cross Sections  
(On 2-lane or Multilane Highways)**




**(1) MARKED PARKING**



\* 13' is recommended where there is substantial parking or turnover of parked cars is high (e.g. commercial areas).


**(2) PARKING PERMITTED WITHOUT MARKED PARKING OR STALL**

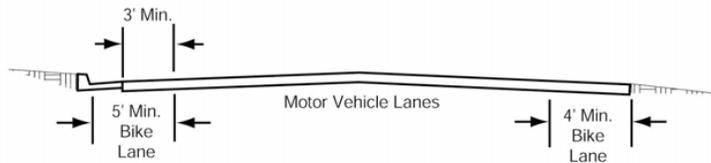

(With Gutter)

**(3) PARKING PROHIBITED**

(Without Gutter)



**(4) TYPICAL ROADWAY IN OUTLYING AREAS PARKING RESTRICTED**

Note: For pavement marking guidance, see the MUTCD and California Supplement, Section 9C.04

Figure 1003.2B illustrates a typical at-grade intersection of multilane streets, with bike lanes on all approaches. Some common movements of motor vehicles and bicycles are shown. A prevalent type of accident involves straight-through bicycle traffic and right-turning motorists. Left-turning bicyclists also have problems, as the bike lane is on the right side of the street, and bicyclists have to cross the path of cars traveling in both directions. Some bicyclists are proficient enough to merge across one or more lanes of traffic, to use the inside lane or left-turn lane. However, there are many who do not feel comfortable making this maneuver. They have the option of making a two-legged left turn by riding along a course similar to that followed by pedestrians, as shown in the diagram. Young children will often prefer to dismount and change directions by walking their bike in the crosswalk.

(4) *Interchange Design.* As with bikeway design through at-grade intersections, bikeway design through interchanges should be accomplished in a manner that will minimize confusion by motorists and bicyclists. Designers should work closely with the local agency in designing bicycle facilities through interchanges. Local Agencies should carefully select interchange locations which are most suitable for bikeway designations and where the crossing meets applicable design standards. The local agency may have special needs and desires for continuity through interchanges which should be considered in the design process.

For Class II bikeway signing and lane markings, see the MUTCD and California Supplement, Section 9C.04.

**The shoulder width shall not be reduced through the interchange area. The minimum shoulder width shall match the approach roadway shoulder width, but not less than 4 feet or 5 feet if a gutter exists. If the shoulder width is not available, the designated bike lane shall end at the previous local road intersection.**

Depending on the intersection angles, either Figure 1003.2C or 1003.2D should also be used

for multilane ramp intersections. Additionally, the outside through lane should be widened to 14 feet when feasible. This allows extra room for bicycles to share the through lane with vehicles. The outside shoulder width should not be reduced through the interchange area to accommodate this additional width.

### 1003.3 Class III Bikeways

Class III bikeways (bike routes) are intended to provide continuity to the bikeway system. Bike routes are established along through routes not served by Class I or II bikeways, or to connect discontinuous segments of bikeway (normally bike lanes). Class III facilities are shared facilities, either with motor vehicles on the street, or with pedestrians on sidewalks, and in either case bicycle usage is secondary. Class III facilities are established by placing Bike Route signs along roadways.


Minimum widths for Class III bikeways are not presented, as the acceptable width is dependent on many factors, including the volume and character of vehicular traffic on the road, typical speeds, vertical and horizontal alignment, sight distance, and parking conditions.

Since bicyclists are permitted on all highways (except prohibited freeways), the decision to designate the route as a bikeway should be based on the advisability of encouraging bicycle travel on the route and other factors listed below.


(1) *On-street Bike Route Criteria.* To be of benefit to bicyclists, bike routes should offer a higher degree of service than alternative streets. Routes should be signed only if some of the following apply:

- (a) They provide for through and direct travel in bicycle-demand corridors.
- (b) Connect discontinuous segments of bike lanes.
- (c) An effort has been made to adjust traffic control devices (stop signs, signals) to give greater priority to bicyclists, as compared with alternative streets. This could include placement of bicycle-sensitive detectors on the right-hand portion of the road, where bicyclists are expected to ride.

**Figure 1003.2B**  
**Typical Bicycle/Auto Movements at**  
**Intersections of Multilane Streets**

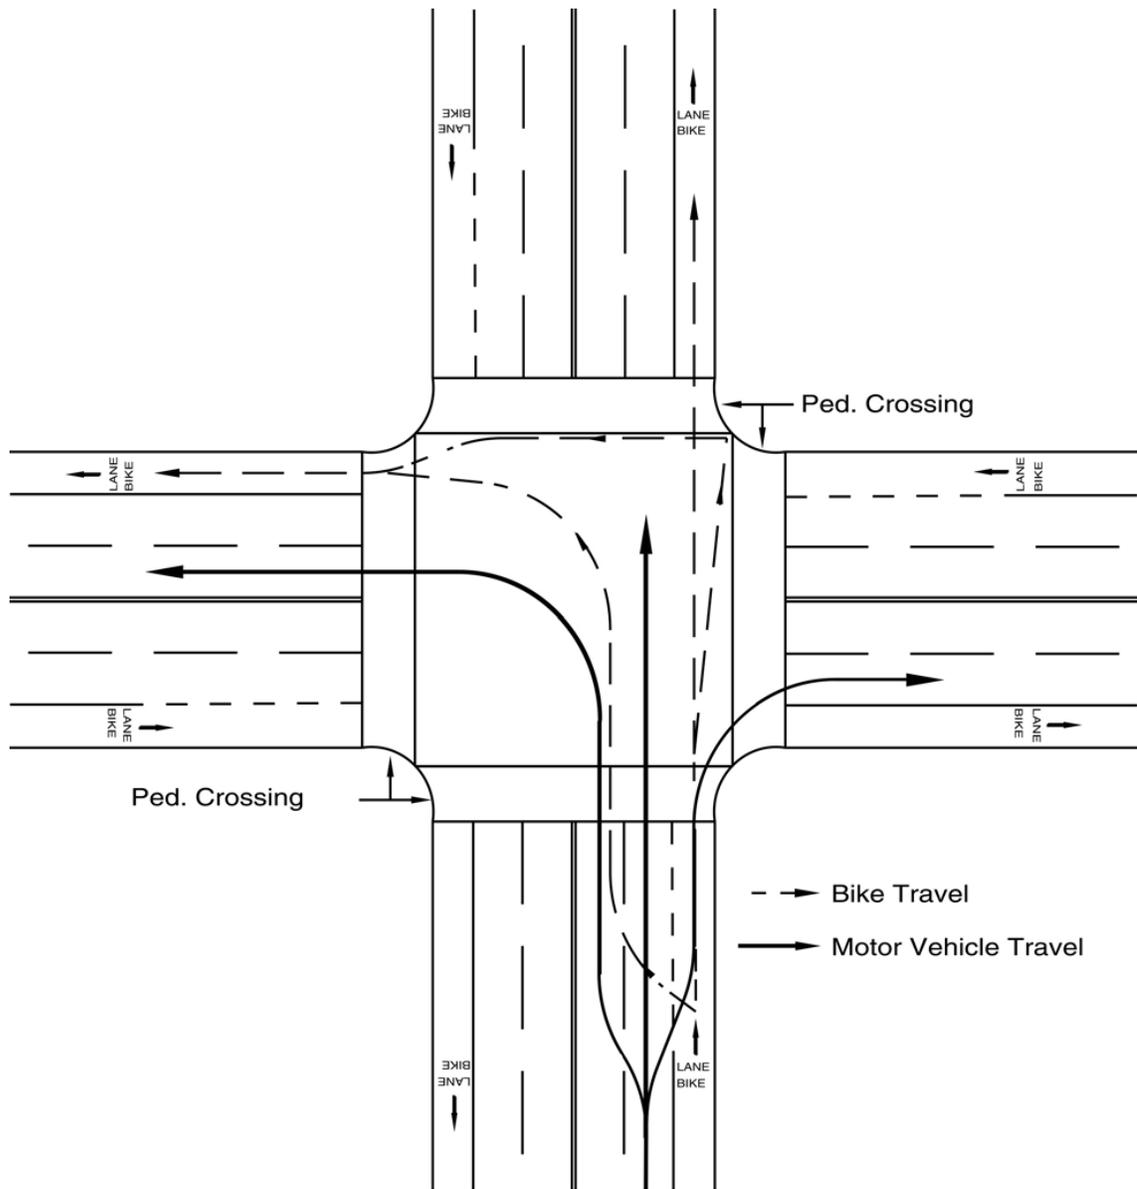


**Figure 1003.2C**  
**Bike Lanes Approaching Motorist**  
**Right-turn-only Lane**

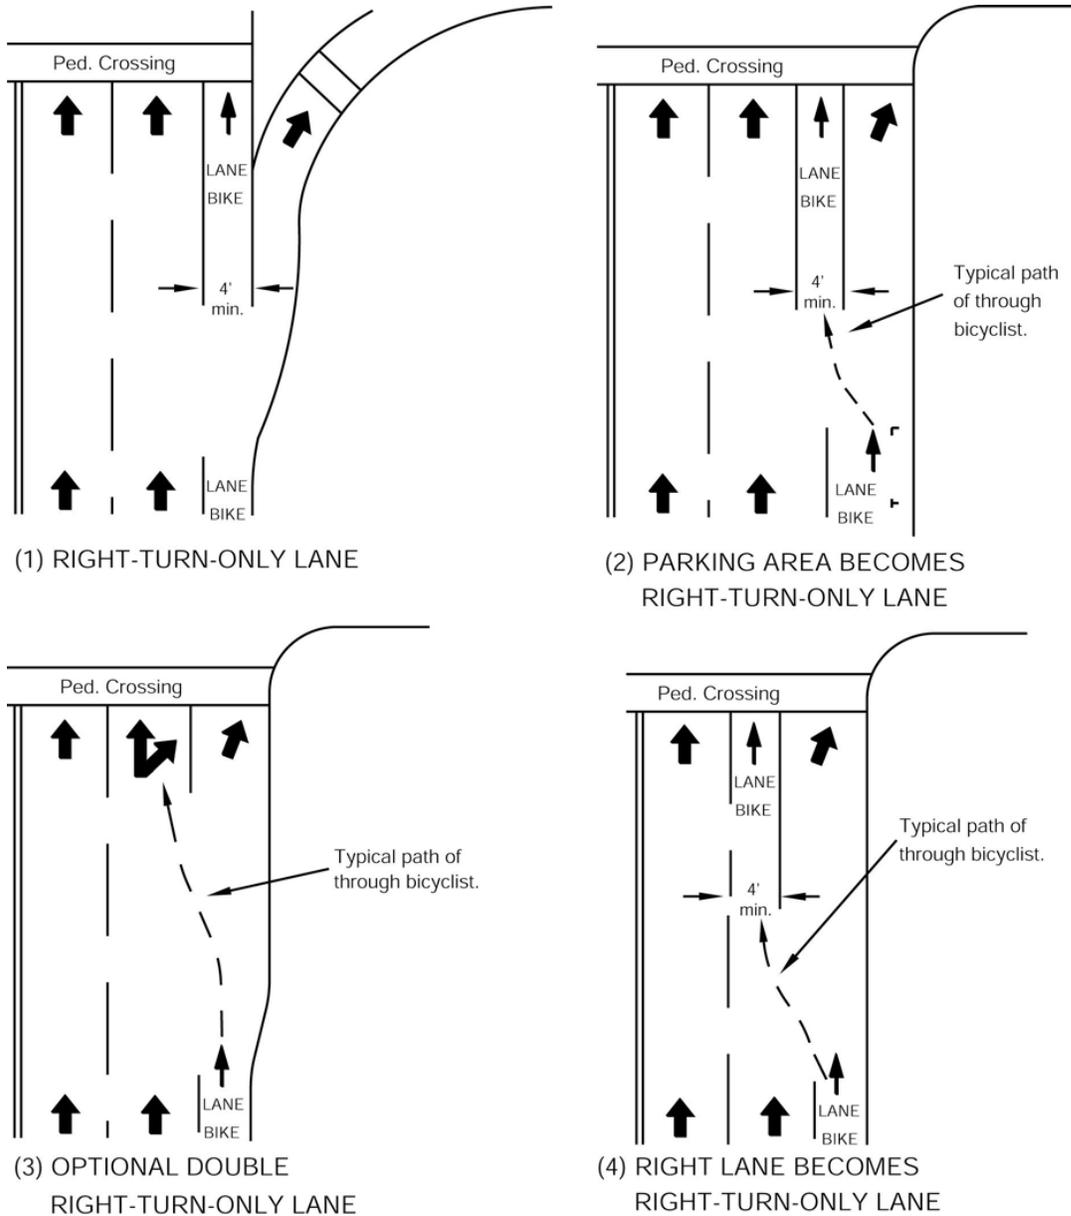

Note: For bicycle lane markings, see the MUTCD and California Supplement, Section 9C.04.

**Figure 1003.2D  
Bike Lanes Through  
Interchanges**

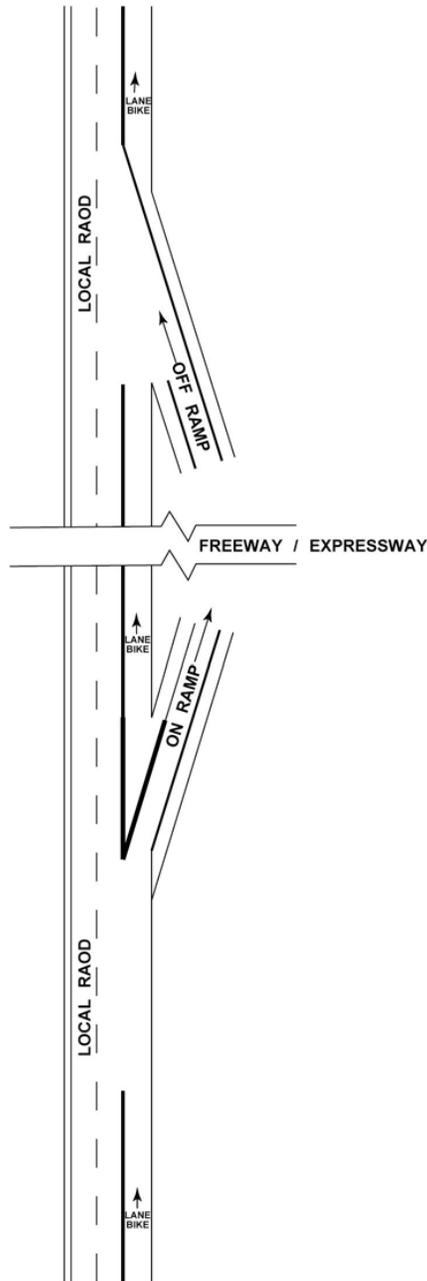

**Notes:**

- 1.) See Index 1003.2(4) for additional information.
- 2.) The shoulder width shall not be reduced through the interchange area. The minimum shoulder width shall match the approach roadway shoulder width, but not less than 4 feet or 5 feet if a gutter exists. If the shoulder width is not available, the designated bike lane shall end at the previous local road intersection.
- 3.) See Index 1003.3(4) for information on Bike Routes Through Interchanges.

- (d) Street parking has been removed or restricted in areas of critical width to provide improved safety.
  - (e) Surface imperfections or irregularities have been corrected (e.g., utility covers adjusted to grade, potholes filled, etc.).
  - (f) Maintenance of the route will be at a higher standard than that of other comparable streets (e.g., more frequent street sweeping).
- (2) *Sidewalk Bikeway Criteria.* In general, the designated use of sidewalks (as a Class III bikeway) for bicycle travel is unsatisfactory.

It is important to recognize that the development of extremely wide sidewalks does not necessarily add to the safety of sidewalk bicycle travel, as wide sidewalks will encourage higher speed bicycle use and can increase potential for conflicts with motor vehicles at intersections, as well as with pedestrians and fixed objects.

Sidewalk bikeways should be considered only under special circumstances, such as:

- (a) To provide bikeway continuity along high speed or heavily traveled roadways having inadequate space for bicyclists, and uninterrupted by driveways and intersections for long distances.
- (b) On long, narrow bridges. In such cases, ramps should be installed at the sidewalk approaches. If approach bikeways are two-way, sidewalk facilities should also be two-way.

Whenever sidewalk bikeways are established, a special effort should be made to remove unnecessary obstacles. Whenever bicyclists are directed from bike lanes to sidewalks, curb cuts should be flush with the street to assure that bicyclists are not subjected to problems associated with crossing a vertical lip at a flat angle. Also curb cuts at each intersection are necessary. Curb cuts should be wide enough to accommodate adult tricycles and two-wheel bicycle trailers.

In residential areas, sidewalk riding by young children too inexperienced to ride in the street

is common. With lower bicycle speeds and lower auto speeds, potential conflicts are somewhat lessened, but still exist. Nevertheless, this type of sidewalk bicycle use is accepted. But it is inappropriate to sign these facilities as bikeways. Bicyclists should not be encouraged (through signing) to ride facilities that are not designed to accommodate bicycle travel.

- (3) *Destination Signing of Bike Routes.* For Bike Route signs to be more functional, supplemental plates may be placed beneath them when located along routes leading to high demand destinations (e.g., "To Downtown"; "To State College"; etc. For typical signing, see the MUTCD and California Supplement, Figures 9B-5 and 9B-6.

There are instances where it is necessary to sign a route to direct bicyclists to a logical destination, but where the route does not offer any of the above listed bike route features. In such cases, the route should not be signed as a bike route; however, destination signing may be advisable. A typical application of destination signing would be where bicyclists are directed off a highway to bypass a section of freeway. Special signs would be placed to guide bicyclists to the next logical destination. The intent is to direct bicyclists in the same way as motorists would be directed if a highway detour was necessitated.

- (4) *Interchange Design* As with bikeway design through at-grade intersections, bikeway design through interchanges should be accomplished in a manner that will minimize confusion by motorists and bicyclists. Designers should work closely with the local agency in designing bicycle facilities through interchanges. Local Agencies should carefully select interchange locations which are most suitable for bikeway designations and where the crossing meets applicable design standards. The local agency may have special needs and desires for continuity through interchanges which should be considered in the design process.

**Within the Interchange area the bike route shall require either an outside lane width of 16-foot or a 12-foot lane and a 4-foot shoulder. If the above width is not available,**

**the designated bike route shall end at the previous local road intersection.**

#### 1003.4 Bicycles on Freeways

In some instances, bicyclists are permitted on freeways. Seldom would a freeway be designated as a bikeway, but it can be opened for use if it meets certain criteria. Essentially, the criteria involve assessing the safety and convenience of the freeway as compared with available alternate routes. However, a freeway should not be opened to bicycle use if it is determined to be incompatible. The Headquarters Traffic Liaisons and the Design Coordinator must approve any proposals to open freeways to bicyclists.

If a suitable alternate route exists, it would normally be unnecessary to open the freeway. However, if the alternate route is unsuitable for bicycle travel the freeway may be a better alternative for bicyclists. In determining the suitability of an alternate route, safety should be the paramount consideration. The following factors should be considered:

- Number of intersections
- Shoulder widths
- Traffic volumes
- Vehicle speeds
- Bus, truck and recreational vehicle volumes
- Grades
- Travel time

When a suitable alternate route does not exist, a freeway shoulder may be considered for bicycle travel. Normally, freeways in urban areas will have characteristics that make it unfeasible to permit bicycle use. In determining if the freeway shoulder is suitable for bicycle travel, the following factors should be considered:

- Shoulder widths
- Bicycle hazards on shoulders (drainage grates, expansion joints, etc.)
- Number and location of entrance/exit ramps
- Traffic volumes on entrance/exit ramps
- Bridge Railing height

When bicyclists are permitted on segments of freeway, it will be necessary to modify and supplement freeway regulatory signs, particularly those at freeway ramp entrances and exits, see the MUTCD and California Supplement, Section 9B.101.

Where no reasonable alternate route exists within a freeway corridor, the Department should coordinate with local agencies to develop or improve existing routes or provide parallel bikeways within or adjacent to the freeway right of way.

The long term goal is to provide a safe and convenient non-freeway route for bicycle travel.

#### 1003.5 Multipurpose Trails

In some instances, it may be appropriate for agencies to develop multipurpose trails - for hikers, joggers, equestrians, bicyclists, etc. Many of these trails will not be paved and will not meet the standards for Class I bikeways. As such, these facilities should not be signed as bikeways. Rather, they should be designated as multipurpose trails (or similar designation), along with regulatory signing to restrict motor vehicles, as appropriate.

If multipurpose trails are primarily to serve bicycle travel, they should be developed in accordance with standards for Class I bikeways. In general, multipurpose trails are not recommended as high speed transportation facilities for bicyclists because of conflicts between bicyclists and pedestrians. Wherever possible, separate bicycle and pedestrian paths should be provided. If this is not feasible, additional width, signing and pavement markings should be used to minimize conflicts.

It is undesirable to mix mopeds and bicycles on the same facility. In general, mopeds should not be allowed on multipurpose trails because of conflicts with slower moving bicyclists and pedestrians. In some cases where an alternate route for mopeds does not exist, additional width, signing, and pavement markings should be used to minimize conflicts. Increased patrolling by law enforcement personnel is also recommended to enforce speed limits and other rules of the road.

It is usually not desirable to mix horses and bicycle traffic on the same multipurpose trail. Bicyclists are often not aware of the need for slower speeds and additional operating space near horses. Horses

can be startled easily and may be unpredictable if they perceive approaching bicyclists as a danger. In addition, pavement requirements for safe bicycle travel are not suitable for horses. For these reasons, a bridle trail separate from the multipurpose trail is recommended wherever possible.

### 1003.6 Miscellaneous Bikeway Criteria

The following are miscellaneous bikeway criteria which should be followed to the extent pertinent to Class I, II and III bikeways. Some, by their very nature, will not apply to all classes of bikeway. Many of the criteria are important to consider on any highway where bicycle travel is expected, without regard to whether or not bikeways are established.

(1) *Bridges.* Bikeways on highway bridges must be carefully coordinated with approach bikeways to make sure that all elements are compatible. For example, bicycle traffic bound in opposite directions is best accommodated by bike lanes on each side of a highway. In such cases, a two-way bike path on one side of a bridge would normally be inappropriate, as one direction of bicycle traffic would be required to cross the highway at grade twice to get to and from the bridge bike path. Because of the inconvenience, many bicyclists will be encouraged to ride on the wrong side of the highway beyond the bridge termini.

The following criteria apply to a two-way bike path on one side of a highway bridge:

- (a) The bikeway approach to the bridge should be by way of a separate two-way facility for the reason explained above.
- (b) **A physical separation, such as a chain link fence or railing, shall be provided to offset the adverse effects of having bicycles traveling against motor vehicle traffic.** The physical separation should be designed to minimize fixed end hazards to motor vehicles and if the bridge is an interchange structure, to minimize sight distance restrictions at ramp intersections.

It is recommended that bikeway bridge railings or fences placed between traffic lanes and bikeways be at least 46 inches high to

minimize the likelihood of bicyclists falling over the railings. Standard bridge railings which are lower than 46 inches can be retrofitted with lightweight upper railings or chain link fence suitable to restrain bicyclists. See Index 208.10(6) for guidance regarding bicycle railing on bridges.

**Separate highway overcrossing structures for bikeway traffic shall conform to Department standard pedestrian overcrossing design loading. The minimum clear width shall be the paved width of the approach bikeway but not less than 8 feet.** If pedestrians are to use the structure, additional width is recommended.

- (2) *Surface Quality.* The surface to be used by bicyclists should be smooth, free of potholes, and the pavement edge uniform. For rideability on new construction, the finished surface of bikeways should not vary more than 6 mm from the lower edge of a 2.4 m long straight edge when laid on the surface in any direction.

Table 1003.6 indicates the recommended bikeway surface tolerances for Class II and III bikeways developed on existing streets to minimize the potential for causing bicyclists to lose control of their bicycle (Note: Stricter tolerances should be achieved on new bikeway construction.) Shoulder rumble strips are not suitable as a riding surface for bicycles. See the MUTCD and California Supplement, Chapter 3B for additional information regarding rumble strip design considerations for bicycles.

- (3) *Drainage Grates, Manhole Covers, and Driveways.* Drainage inlet grates, manhole covers, etc., on bikeways should be designed and installed in a manner that provides an adequate surface for bicyclists. They should be maintained flush with the surface when resurfacing.

**Table 1003.6  
Bikeway Surface  
Tolerances**

Direction of Travel	Grooves <sup>(1)</sup>	Steps <sup>(2)</sup>
Parallel to travel	No more than ½" wide	No more than ⅜" high
Perpendicular to travel	---	No more than ¼" high

Notes:

- (1) Groove--A narrow slot in the surface that could catch a bicycle wheel, such as a gap between two concrete slabs.
- (2) Step--A ridge in the pavement, such as that which might exist between the pavement and a concrete gutter or manhole cover; or that might exist between two pavement blankets when the top level does not extend to the edge of the roadway.

**Drainage inlet grates on bikeways shall have openings narrow enough and short enough to assure bicycle tires will not drop into the grates (e.g., reticuline type), regardless of the direction of bicycle travel.** Where it is not immediately feasible to replace existing grates with standard grates designed for bicycles, 1" x ¼" steel cross straps should be welded to the grates at a spacing of 6 inches to 8 inches on centers to reduce the size of the openings adequately.

Corrective actions described above are recommended on all highways where bicycle travel is permitted, whether or not bikeways are designated.

Future driveway construction should avoid construction of a vertical lip from the driveway to the gutter, as the lip may create a problem for bicyclists when entering from the edge of the roadway at a flat angle. If a lip is deemed necessary, the height should be limited to ½ inch.

- (4) *At-grade Railroad Crossings and Cattle Guards.* Whenever it is necessary to cross railroad tracks with a bikeway, special care must be taken to assure that the safety of

bicyclists is protected. The bikeway crossing should be at least as wide as the approaches of the bikeway. Wherever possible, the crossing should be straight and at right angles to the rails. For on-street bikeways where a skew is unavoidable, the shoulder (or bike lane) should be widened, if possible, to permit bicyclists to cross at right angles (see Figure 1003.6A). If this is not possible, special construction and materials should be considered to keep the flangeway depth and width to a minimum.

Pavement should be maintained so ridge buildup does not occur next to the rails. In some cases, timber plank crossings can be justified and can provide for a smoother crossing. Where hazards to bicyclist cannot be avoided, appropriate signs should be installed to warn bicyclists of the danger.

All railroad crossings are regulated by the California Public Utilities Commission (CPUC). All new bike path railroad crossings must be approved by the CPUC. Necessary railroad protection will be determined based on a joint field review involving the applicant, the railroad company, and the CPUC.

The presence of cattle guards along any roadway where bicyclists are expected should be clearly marked with adequate advance warning.

- (5) *Obstruction Markings.* Vertical barriers and obstructions, such as abutments, piers, and other features causing bikeway constriction, should be clearly marked to gain the attention of approaching bicyclists. This treatment should be used only where unavoidable, and is by no means a substitute for good bikeway design. See the MUTCD, Section 9C.06.

1000-26

September 1, 2006

**Figure 1003.6A  
Railroad Crossings**

